

The Monitor RD70

Full-Height Turnstiles
Interior & Exterior Application

RD70

Block out weather and noise!

The Monitor RD70 Series is a full security card access, tamper-resistant revolving door. It is designed for locations requiring improved visitor security or as the barrier between production and office areas. Quiet in day/night mode, it can provide free passage during regular working hours and controlled passage after hours with card access or biometrics.



Measurements:

Exterior Height: 94" to 120" available

Width: 72"

Pedestrian Clearance: 30"



Available as a Metal-Detect Door where higher security needs exist. Metal detection and bullet-resistant panels are available in varying performance specs based on your application.

8641 S. Warhawk Rd. Conifer, CO 80433
(303) 647-1569 x101 (303) 679-8949 fax
Patrick.McAllister@TURNSTILES.us

The Monitor RD70

Full-Height Turnstiles Interior & Exterior Application

RD70

Applications:

Block out weather and noise!

The Monitor RD70 Series is a full security card access, tamper-resistant revolving door that's designed for locations requiring improved visitor security or as the barrier between production and office areas. Quiet in day/night mode, it can provide free passage during regular working hours and controlled passage after hours with card access or biometrics. It is crafted of 6005-T6 aluminum extrusions and features GE's transparent Lexan polycarbonate cage panels and arms for an un-caged appearance.

Product Features:

Materials and Finishes available in your choice of:

- Available in your choice of Clear, Dark Bronze or Black
- Performance features include automatic indent Feather-Touch action – that includes shock suppressor technology and a non-entrapment design

Design & Construction:

- Designed for secure operation with aesthetics in mind
- Features minimal exposed hardware and meets ASTM standards

Controller & Access Control Operation:

- Self-centering control head with adjustable hydraulic shock suppression
- Hardened tool steel locking bars, cam and roller assemblies
- Permanently lubricated bearings
- Available in clockwise, counter-clockwise or bi-directional passage

Measures:

Exterior Height

94" to 120" available

Width

72"

Pedestrian Clearance



30"

Options:

- Electronic locking module featuring heavy-duty 24 vdc pull-type industrial solenoids and card reader interface
- Available in Fail-Safe (open on power failure) or Fail-Lock (lock on power failure modes)
- Can interface with card readers, computer attendance systems, coin and token acceptors, push buttons, wireless remote controls and metal detectors
- Electronic 6 digit resettable counter with LCD display and ten-year lithium battery
- Vertical Graphic Array (VGA) red x / green arrow
- Additional options available on request
- Level-one bullet resistant armor
- Traffic light control module with low voltage LED's
- Control Console with remote alarms and push buttons
- Low voltage canopy lighting

Matching Swing Gate available

(see model SFH36 Manual Passage Gate information)

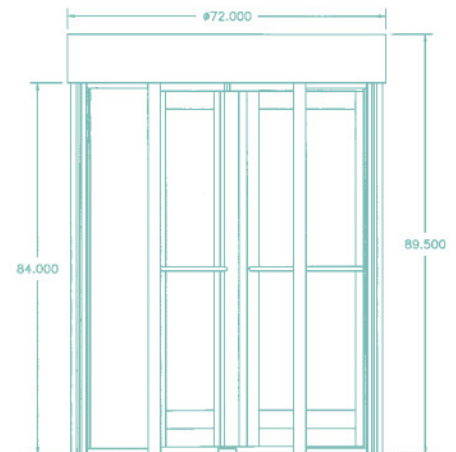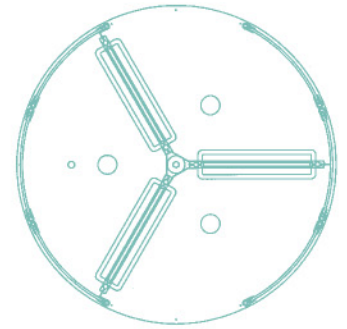

Electrical Specifications:

Command module input 110-240 VAC (2 amp-1 amp) 50-60 Hz; control voltage 24 VDC. All electrical components are UL recognized and CSA certified.

Warranty:

Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details.



8641 S. Warhawk Rd. Conifer, CO 80433
(303) 647-1569 x101 (303) 679-8949 fax
Patrick.McAllister@TURNSTILES.us