


# Security Full-Height Series

Manual Passage Gate  
Interior & Exterior Application

SFH36-ADA



Manual and electronic locking access gates and custom filler barriers can be fabricated to match any of our Security Full-Height Series turnstiles. Standard width for passage gates is 36" and customized widths are available – just give us a call.

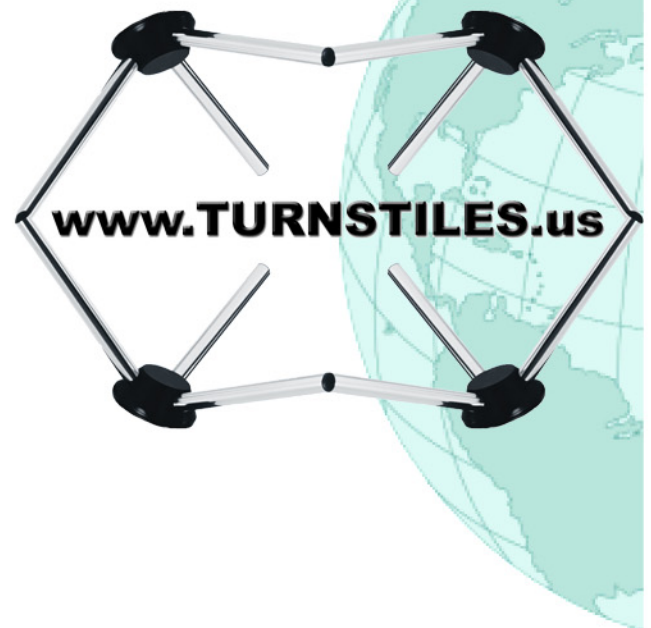

**SFH36-ADA**  
**Manual Passage Gate**  
**304 Stainless,**  
**No. 4 Satin finish (shown)**

*Also available in  
hot-dipped galvanized or  
powder coat finishes.*

8641 S. Warhawk Rd. Conifer, CO 80433  
(303) 647-1569 x101 (303) 679-8949 fax  
Patrick.McAllister@TURNSTILES.us

# Security Full-Height Series



Manual Passage Gate  
Interior & Exterior Application

SFH36-ADA

## Applications:

Ideal for controlling orderly flow of foot traffic in both indoor and outdoor settings (matching gate to our Security Full-Height Series Single and Tandem Turnstiles)

## Product Features:

### Materials and Finishes available in your choice of:

- Hot dipped galvanized carbon steel
- Polyester enamel on carbon steel (standard color is black/ other colors available upon request)
- Our signature 304 Stainless steel/ No. 4 satin finish

## Design & Construction:

- Designed for secure operation with aesthetics in mind
- Featuring fully welded exterior components
- Minimal exposed hardware
- Heavy gauge materials meeting ASTM standards

## Measures:

### SFH36-ADA

#### Size of opening (pedestrian clearance)

SFH36-ADA 36" (914mm)

#### Frames and Door Jam

2" x 2" (51mm x 51mm) 11 gauge box tubing

#### Exterior Height

91" (2331mm)

#### Interior Height

88-1/2" (2248mm)

#### Interior Tubing Sizes

1-1/2" Diameter 14 gauge (2248mm)


1-3/4" Diameter 14 gauge (44mm)

1-3/4" Diameter 11 gauge (44mm)

## Features:

- Swing Gate is equipped with outdoor rated electronic strike lock and automatic door closer
- Keylock - Control direction of travel manually by key (to lock or unlock), or may be used to override electronic controls.

**Matching Full-Height Turnstiles Available** in Single (SFH27-S, SFH30-S, SFH39-S, SFH48-S) and Tandem (SFH27-T, SFH30-T) Designs.

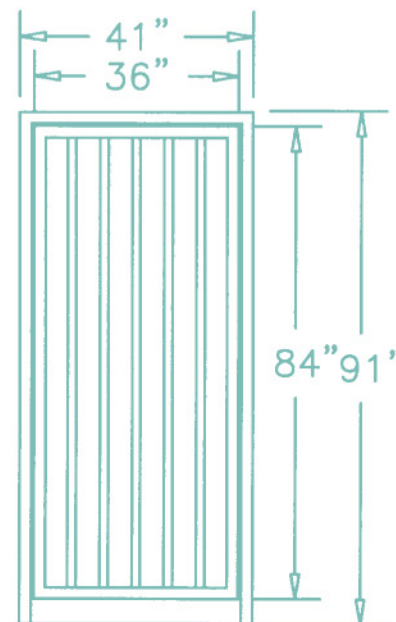

HS336-ADA

## Electrical Specifications:

Command module input 110-240 VAC (2 amp-1 amp) 50-60 Hz; control voltage 24 VDC. All electrical components are UL recognized and CSA certified.

## Standards and Codes:

Austenitic stainless steel:  
ASTM A240, A249, A276  
Hot rolled steel:  
AISI C-1020, AISI C-1018  
Hot dipped galvanizing:  
ASTM A-143, ASTM A-153-80  
Stainless steel fasteners:  
ASTM A-320  
American Welding Society (AWS)  
Standard D 1.1

## Warranty:

Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details.



8641 S. Warhawk Rd. Conifer, CO 80433  
(303) 647-1569 x101 (303) 679-8949 fax  
Patrick.McAllister@TURNSTILES.us